

All Stainless ss LP PipeGuard with one piece EP,N, or VF gas bag

The original 1965, no poppet to jam, no glue or bonds in the bag, pulse interceptor & accumulator.

Twin connections are off the shelf inventory items. If you do not wish to intercept pressure pulsation, nor to flush before service, then save the cost of an extra "T", and use the second connection for you RV, Drain, or Gauge. For High pressures gas bags see PipeGuard /HP.



ORDERING - PART NUMBER "Off the shelf" / Inventory Damper US \$\$ INCHES Lbs.

MODEL type	In 3	PSIG	Material	Connections	pares Kit	Net 1 pc.	F.O.B.	Lgth L	Diam D	Weight
	At 200 Deg F			NPT F NPT	Pt. # SK-		Hampstead NC USA			
PiG-SS-LP/	1.0i /1000p/	316/	1/4"Fx1/8"F	B25x50	99.00	4.1	1.4	2.6		
PiG-SS-LP/	6.0i /700p /	316/	3/8"Fx1/4"F	B44x75	119.00	6.0	2.0	3.0		
PiGSS-LP/	15i /600p /	316/	1/2"Fx3/8"F	B57x98	164.00	7.5	2.5	5.5		
PiG-SS-LP/	40i /600p /	316/	3/4"Fx1/2"F	B63x207	199.00	12.75	2.8	7.0		
PiG-SS-LP/	60i /500p /	316/	1.0"Fx3/4"F	B72x255	224.00	14.5	3.25	9.0		
PiG-SS-LP/	120i /600p /	316/	1.25"M x1.0"M	B98x300	293.00	15.6	4.5	12.5		
PiG-SS-LP/	180i /600p /	316/	1.5"M x 1.25"M	B123x295	397.00	1.5	5.5	37.0		
PiG-SS-LP/	300i /600p /	316/	2.0"M x1.5"M	B139x325	748.00	22.0	6.2	65.0		

316SS is dual certified stainless steel. DSS=Duplex Stainless Steel. SDSS=SuperDuplex Stainless. M=Male connection. F=Female connection

Dampers that do -Flow goes through - pressure pulses do not

The Original Top End In Place Servicable Gas Bag Damper From The 1965 Originators.

9019c 304ss PreFill Valve, as used on all military and civil aircraft, Use 3/4" Wrench, No Special Tools.

The Difference Is In The Detail

We Mold Our Gas Bags in high intensity transject tooling, as one piece. There is no glue or bond. This allows the use of the least reactive and most resistant elastomer formulations.

The bag end is stabilized by internal webs which ensure the correct position of the anti-extrusion plate; this enable reliable operation in many orientations, So that our anti-extrusion plates do not "just fall off".

Licensed. M. Packer '63


INSTALLATION OPTIONS

Vertical Pump connections | Horizontal Pump connections

For Pressure Pulsation Interception And In Place Flushing

THROUGH FLOW


Pressure Pulse Damper within 12 Pipe Diameters from pump

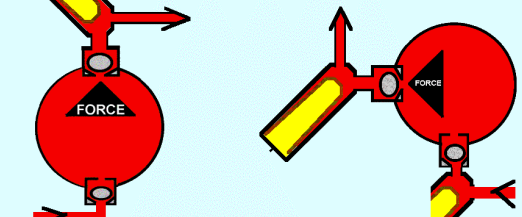

For Flow Fluctuation Removal only


ON A "T"

Straight Line from Pump to Flow Accumulator

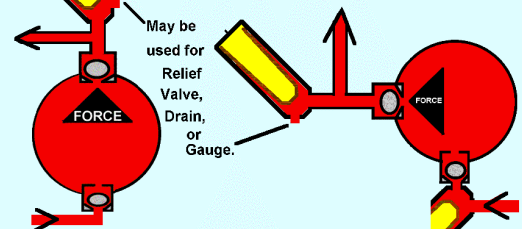

For Technical Service, other Damper types as below, and Quantity Discount

Please Call **PULSEGUARD** Ltd. FreePhone 08080 LO-PRICE (567-7423), Fax -44(0)161-443-1486 Inc. Toll Free 1-888 DAMPERS (326-7377), Free Fax 1-888-825-5357



UK for Europe & Asia: PO Box 47 Stockport Ches. England. USA for the Americas PO Box Hampstead NC 28443