

PVC, PolyProp. Plastics **PipeGuard** one piece EP,N, or VF gas bag

The original 1965, no poppet to jam, no glue or bonds in the bag, pulse interceptor & accumulator.

Twin connections are off the shelf inventory items. If you do not wish to intercept pressure pulsation, nor to flush before service, then save the cost of an extra "T", and use the second connection for RV, Drain, or Gauge. For Higher pressure units see PipeGuard SS/LP



ORDERING - PART NUMBER "Off the shelf" / Inventory Damper US \$s INCHES Lbs.

MODEL type / In3 VOL. / PRES PSI / Material / Connections	Spares Kit	Net F.O.B.	LENGTH	DIAMETER	WEIGHT
at 100 Degrees F	Pt. # SK-	Hampstead NC USA	L	D	
PiG-Plas / 1i / 225p / PVC / 1/8"x1/8"	B25x50	65.00	4.125	1.75	1.0
PiG-Plas / 6i / 200p / PVC / 1/4"x1/4"	B44x75	122.00	6.25	2.56	.20
PiG-Plas / 15i / 175p / PVC / 1/2"x3/8"	B57x98	165.00	8.125	3.45	5.0
PiG-Plas / 15i / 175p / PP / ,, ,,	B57x98	180.00	,,	,,	4.0
PiG-Plas / 60i / 150p / PVC / 3/4"x1/2"	B63x214	198.00	12.0	3.45	6.0
PiG-Plas / 90i / 150p / PP / 1.0"x3/4"	B98x232	285.00	14.5	5.22	5.0


LARGER STANDARD SIZES OF **PipeGuard / Plas** Dampers

Volume	Gas Bag #	Pressure	Not "Off the shelf" / Inventory Items			
PP & PVC	Mtl. EPDM	@ 100 F	INCHES		POUNDS	
In3	or Buna N	PSI	LENGTH L	DIAMETER D	PP	PVC
180	B 139x178	125	12.25	7.5	12.4	19.3
356	B 139x325	125	18.0	7.5	13.7	21.4
488	B 139x420	125	21.75	7.5	14.7	22.6
670	B 195x360	102	19.75	10	27	42.1




Alternate method of liquid end closure, generally used with materials such as Glass Filled PTFE, Kynar PVDF, Nylons etc.

For hazardous and for cold applications, where fracture of plastic would be a danger, there are dampers with plastic liquid contact parts for compatibility, but which have metal outer housings. These are also available with synthetic rubber / elastomer linings. For details please refer to the PIPEHUGGER LP range.

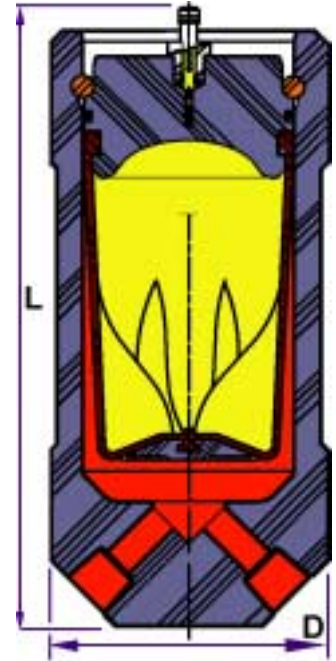


Decide whether you want flow fluctuation smoothing plus high frequency pressure pulsation damping, or only flow fluctuation reduction, then install as shown below for full performance .

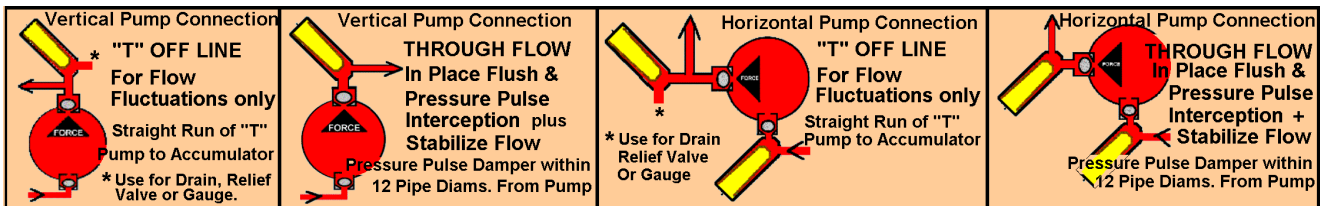

For Technical Service, other Damper types as below, and Quantity Discount

Please Call: **PULSEGUARD** LTD FreePhone 08080 LO-PRICE (567-7423), Fax -44(0)161-443-1486 & Inc. Toll Free 1-888 DAMPERS (326-7377), Free Fax 1-888-825-5357



UK for Europe & Asia: PO Box 47 Stockport Ches. England. USA for the Americas Hampstead NC 28443-0506